




# COMBINED TERMINAL BLOCK

**TH-100CTB**

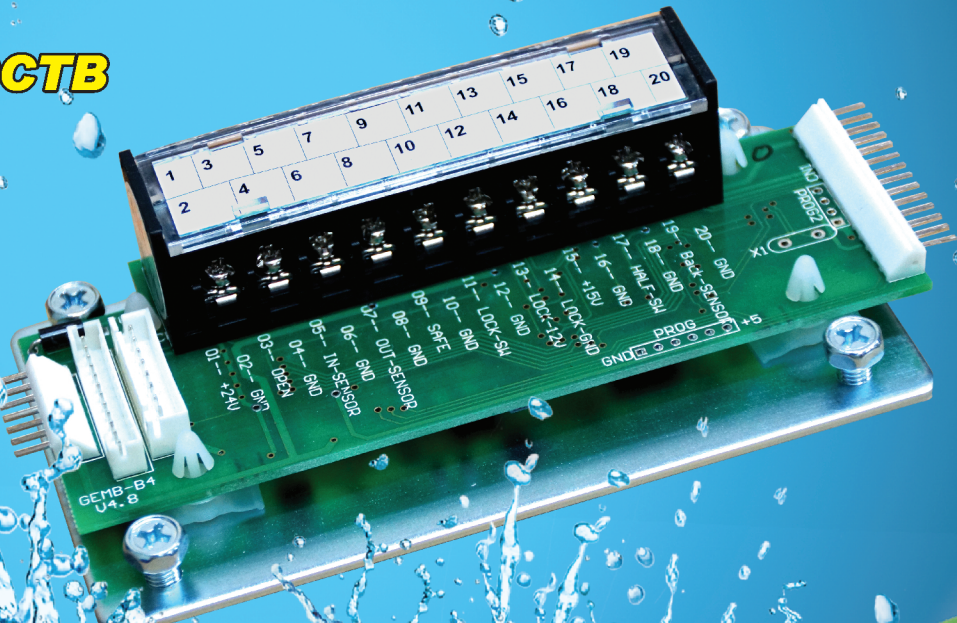

## **TECHNOLOGICAL DETAILS**

**POWER: DC24V,DC13V**

**WORKING ENVIROMENT: -20°C to +50°C**

**VOLUME: 10x6.3x3.5(cm)**

**WEIGHT: 0.20kg**

## **FEATURE of THE PRODUCTS**

**User-friendly design. Fixed directional function for entrance control.**

**Able to collect the wires of various optional devices.**

**(eg. Supply DC24V for the sensor ;DC13V for the electric lock.)**

**Add the new connect19,20 for install the side screen sensors for avoid doors hit person who standing the side while door is moving to open position.**

**KTH KING TA HAN TECHNOLOGY CO., LTD.**

LOCATION : KAOHSIUNG, TAIWAN Global Website : <http://www.kth-automaticdoor.com> E-mail address : [export@kthtw.com](mailto:export@kthtw.com) [kth@kthtw.com](mailto:kth@kthtw.com)