


TH-W2/AD-W2 TELESCOPIC DOORS








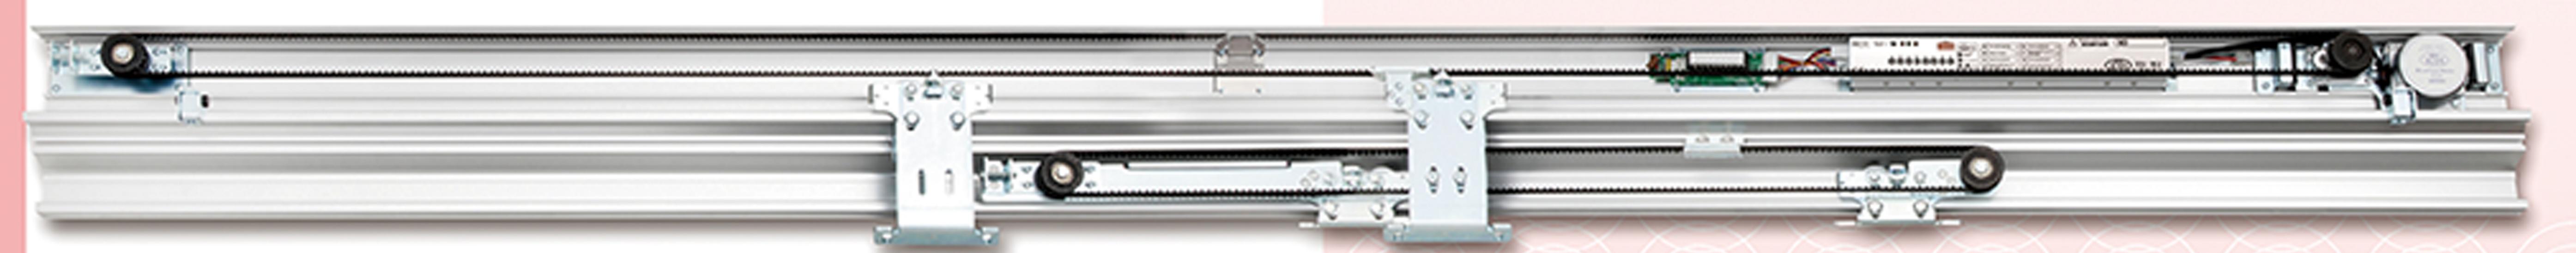




OUR TELESCOPIC DOOR OPERATOR'S FEATURES

- Maximum use in a limited space. It's suitable for places where a wider opening required.
- ★ Unique Aluminum Track design
- ★ Elegant Appearance for any buildings and architecture
- Highly using spaces for more room
- ★ Excellent Quality & High-performance

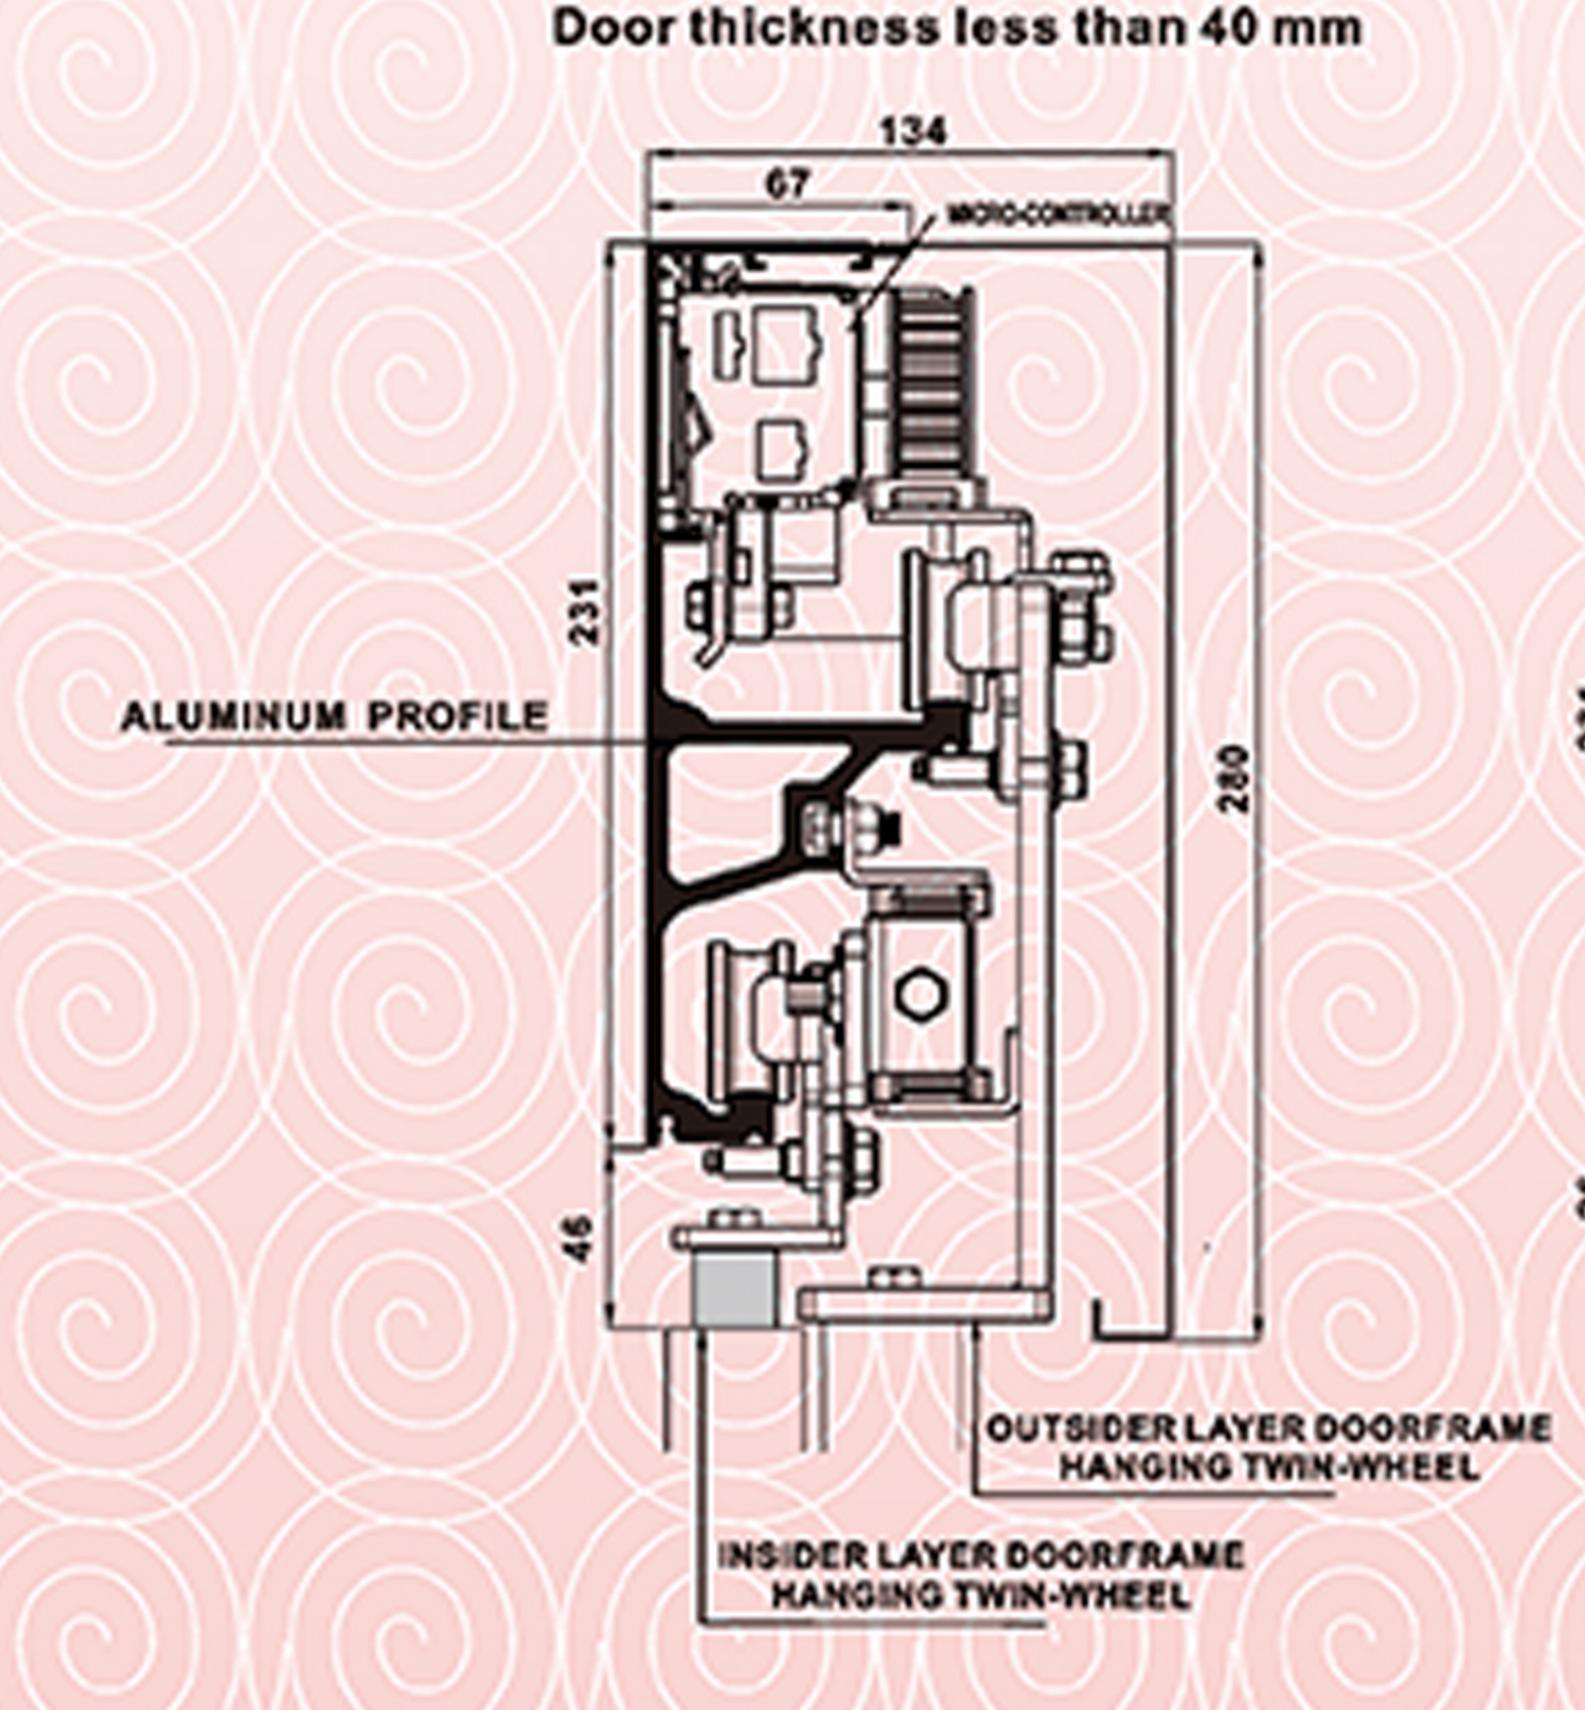

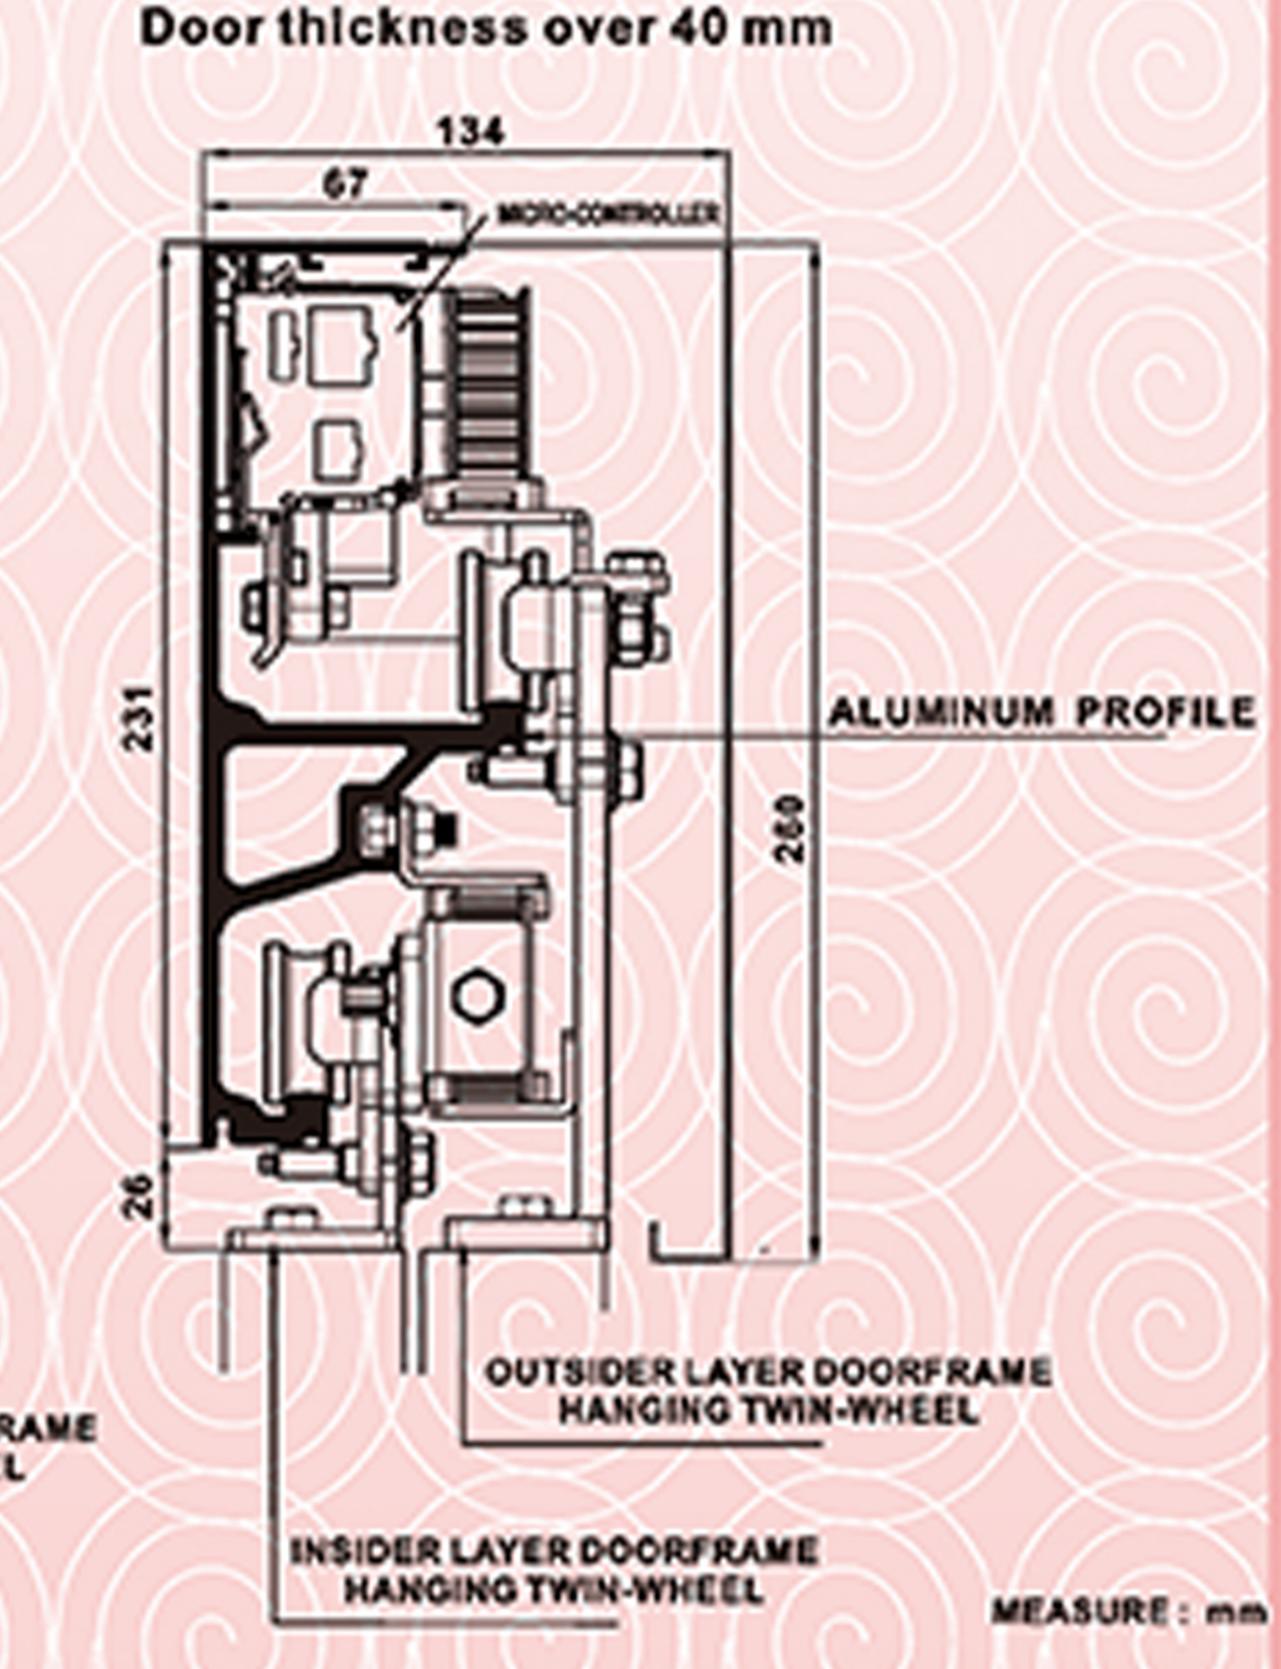

TYPE	TH-W2	
MODEL	Telescopic 2-winged	Telescopic 4-winged
DOOR WEIGHT	130kg X2(door)	90kg X4(door)
DOOR WIDTH	DW=500mm=3000mm	DW-500mm-3000mm
INSTALL WAY	Surface install	Surface install
MOTOR	DC24V 75W BRUSHLESS DC MOTOR	
CONTROL	STANDARD MICRO-CONTROLLER	
POWER CONSUMPTION	75W	
VOLTAGE	AC100V~240V	
ENVIRONMENTAL TEMPERATURE	-20°C→+50°C	
VOLUME	60 decibel(max.)	
STARTING SPEED	650mm/(second)	600mm/(second)
STARTING TIMES	0-20 sec. (regulable)	
TRANSMISSION REPORTANT CONDITION	RACK BELT S8M	
OPENING DOOR RANGE	FULL/HALF-OPEN (regulable)	
PFC/comex exposency	0.95(in AC100V Full load)	
TRACTION FORCE	3 kg	

TYPE	AD-W2	
MODEL	Telescopic 2-winged	Yelescopic 4-winged
DOOR WEIGHT	130kg X2(door)	90kg X4(door)
DOOR WIDTH	DW+500mm-3000mm	DW-500mm-3000mm
INSTALL WAY	Surface install	Surface install
MOTOR	DC24Y 75W WORM GEAR MOTOR	
CONTROL	USER-FRINEDLY MICRO-CONTROLLER	
POWER CONSUMPTION	75W	
VOLTAGE	AC100V~240V	
EMPROVENTAL TEMPERATURE	-20°C~+50°C	
VOLUME	60 decibel(max.)	
STARTING SPEED	650mm/(second)	600mm/(second)
STARTING TIMES	0~20 sec. (regulable)	
TRANSPISSON MPORTUTI CONDITION	RACK BELT S8M	
OPENING DOOR RANGE	FULL/HALF-OPEN (regulable)	
PFCrower emouncy	0.95(in AC100V Full load)	
TRACTION FORCE	3 kg	